



| Ver. | Modify No. | Details | Area | P.I.C | Date |
|------|------------|---------|------|-------|------|
| | | | | | |
| | | | | | |
| | | | | | |



Front View

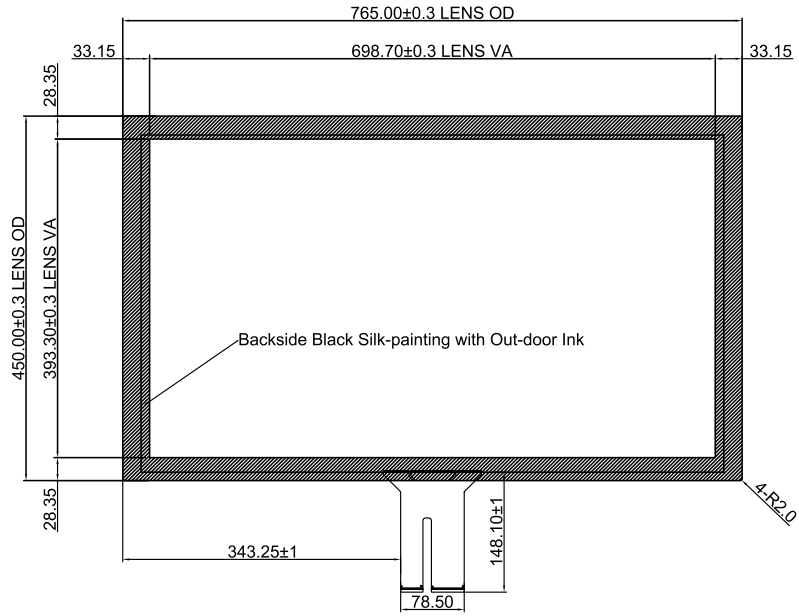

Side View

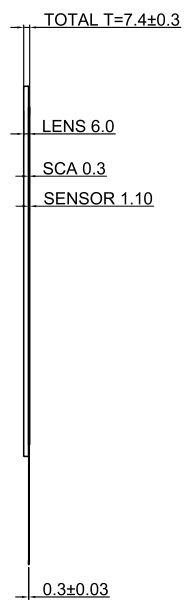

Bottom View

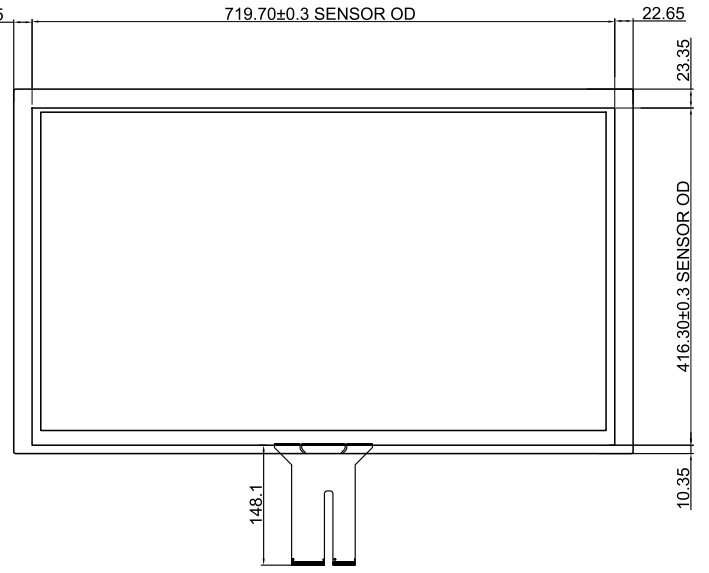

SCALE: 2: 1

- Technical Datasheet:
- Structure: Cover Glass+SCA+ITO Glass
 - Controller: BTP-GG-CTR-ILI-320B COB
 - Controller IC: ILI2312C3P3V1 (Interface: USB)
 - Cover Glass: T=6mm, Tempered Glass
Surface hardness ≥6H
 - Light transmittance: ≥80%
 - Working Temperature: -20℃~+80℃, ≤85%RH;
 - Storage Temperature: -30℃~+80℃, ≤85%RH;
 - Unmarked Tolerance: ± 0.3 mm;
 - All material used conform to RoHS standards

| Touch Panel Structure | |
|-----------------------|---------|
| TOP | |
| ----- Cover | 6.0mm |
| ----- SCA | 0.3mm |
| ----- ITO | } 1.1mm |
| ----- Sensor glass | |
| ----- ITO | |
| BOTTOM | |

| | |
|------------------|------------|
| Designed by: | Curry.Wang |
| Checked by: | Rocky.Liu |
| Approved by: | Cale.Chen |
| Workmanship: | Yong.Xin |
| Standardization: | Link.Chen |
| Released by: | Rocky.Liu |

| | | | | |
|--------------------------------------|------------------|--|----------------|-------|
| Part No. | | BTP-GG-TPB-32-ILI-SN04 | | |
| Product Name: 32 inch Touch Panel | | Drawing No. | G320240211SN04 | |
| | | Project Code. | G320SN04 | |
| Business Unit: SNT-BTP | | Period Mark | View Angle | Ratio |
| | | A | | 1:1 |
| BOM Code | 1.03.320.01.0104 | Page 1 | Total 1 Page | |
| Product Series | BTP-GG | 思诺泰科创电子(苏州)有限公司 SINOTECTRONICS INC. | | |